

Super
velvet®



Super Velvet®

A luxury combination carpet underlay consisting of richly textured velvet fibres joined to a deluxe rubber crumb base

Technical specifications

Recommended end use:

Suitable for luxury domestic applications, stretch fitting, stairs and high traffic areas

Super Velvet®


Construction	Felt and Rubber
Density	80oz Sq. Yard
Thickness	12mm
Tog Rating	3.0 TOG
Noise Reduction	48 dB
Comfort Rating	Luxury
Area Coverage	10m ² (1.37m x 7.3m)
Roll Dimensions	137 x 33 x 33 cm
Double Stick Applications?	No

Product Specifications

Top Surface	Textured fibre appearance
Bottom Surface	Rubber crumb
Recyclable	Yes
Guarantee	Lifetime of initial carpet installation (when used in recommended areas)
Recommendation	Heavy footfall areas, ideal for Hotels, Bars, Pubs or commercial sectors
Installation Method	Lay fibre side upwards, rubber crumb side to the subfloor. All corners must have spray adhesive applied. Always use a fresh, sharp blade/heavy duty shears when cutting.

Technical Specifications

Testing	Result	Method
Resistance to Cracking	<50mm	BS EN 14499:2015
Static Loading	<40%	BS EN 14499:2015
Dynamic Loading	<15%	BS EN 14499:2015
Retention of Compression	>40%	BS EN 14499:2015
Work of Compression	50-200J/m ²	BS EN 14499:2015

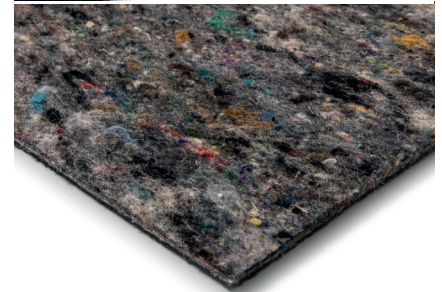

3.0 TOG
BS4745



48 dB
BS EN ISO 10140-3:2010

MANUFACTURER:

Wilsons Underlays Ltd. Dewsbury, WF13 3RD.

DISCLAIMER:

The data on this sheet is meant for information purposes only. The typical properties listed are the result of extensive research & laboratory tests, the materials used may vary and we cannot guarantee these results are obtained in practice. Users should conduct their own tests to determine the suitability of each material to its intended application.

01924 451 138 | sales@wilsons-group.com

 wilsons-underlays.co.uk



Wilson's Underlays
THE BEST WAY TO TAKE CARE OF YOUR CARPETS